


they, in no way, will
interfere with the cutting
tools or means. In this
case the strap // U moved
over to mie_suj, «⁰ order to
give room for the Im-
dum[^] /•' anil ihr_{M-t} M/IVW
A** Strap (./' should then he
moved aUu, beiau[^]e
moving the t straps in
opposite dim/turns still
[^]ive[^] them .1 bal.mo-d
danminr action on the work.
If tin* strap H had been kit
in pl;uv v'tl the strap //
moved sideways, there
would have been some t»
dency to tilt the work,
inies one e ill tlie fitltir-, at .ill with
the work, ,n hiich a the jil! isiti'.t tie
he ina

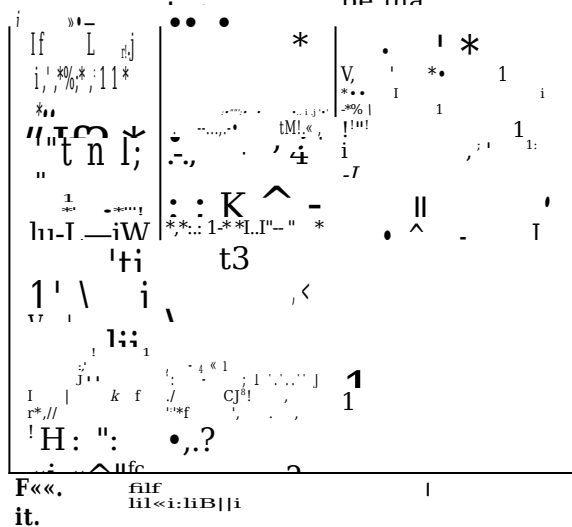

the lines
indicated in Fig,
t;, tin* iV-
where the? drill
bushing-* ar«-
j*U**d
will tit*
jH*rju'itiiituhr
to tiir a\i.
will, in IMI wuy»
inu-rfrrr

the *
peipenci
itttbr to
tin* farr-,
i>i tin-
w*»
from
tilt*
opposit
e Htiir
uf lilt-

work,
fcCt II. I1_t
hmVrVirT, }»r li-rn-
i

and

 j*rf|irti»!ii
 ul.i;
from **the** 44t%
a.n arrani^ttu-ut

shown in Htf, it,
»I
at the ffijttrnt
.it*i*Jr. ti
,iil!)*

»Ii
thr
'it!r;i |
jj\$|ict
%i|i» to

Hi* |4»tnr»i

su that

f-ottgii tiir-

Iti i|r ,|s

'flii^

lil|,;,* i-4

Imlrs

life

.r» thrM*

i ,iii tir

jii* **ihm**

fr:4iii|* «ii

the y in

«*ur

at an

i flir fat

i" ii! III!

*

•»h*»\vii

ill Fill- tj

..ifnr

;|s till* ||g

i! ,i

lifritiiiiic

J is

i

i

a

i

H

H

t

h

d